



Radio Frequency Exposure

RF Safety and NIER Analysis Report

03/18/2021

Site: Ozone

**Hermosa Beach, CA
Prepared for: Verizon**

Table of Contents

1	Certification	3
2	Executive Summary	4
2.1	Conclusion and Recommendations	5
3	Introduction	6
3.1	Site Description:	6
3.2	Site Configuration Being Modeled	7
4	Predictive Analysis Details	8
4.1	Analysis Locations:	8
4.2	Antenna Inventory	9
4.3	RF Emissions Diagram(s) - All Transmitters	10
4.4	RF Emissions Diagram(s) - Verizon Transmitters Only	13
5	Signage/ Mitigation	16
5.1	Signage/ Barrier Detail	16
5.2	Signage/ Barrier Diagram	17
6	Conclusions and Recommendations	18
7	Appendix A: FCC Compliance and RF Safety Policies	19
8	Appendix B: Overview of RoofMaster® Functions and Assumptions	21
9	References	24
10	Limited Warranty	25

1 Certification

This report, prepared by Pramira, Inc. for **Verizon**, is intended to document compliance and evaluate power density levels as outlined in the report. The computations, analysis, and resulting report and conclusions were based on applicable FCC guidelines and regulations for maximum permissible exposure to humans consistent with FCC OET Bulletin 65, Edition 97-01.

Additionally, Pramira, Inc. certifies that the assumptions are valid and that the data used within Pramira control are accurate, including information collected as part of Pramira field surveys. Pramira, Inc. does not however certify the accuracy or correctness of any data provided to Pramira, Inc. for this analysis and report by Verizon or other third parties working on behalf of Verizon.

I certify that the attached RF exposure analysis and report is correct to the best of my knowledge, and all calculations, assumptions and conclusions are based on generally acceptable engineering practices:



AmerAlkloub, P.E.







Report Prepared By: Mohamed Ahmed, 03/18/2021

Report Reviewed By: Mike Arnold, 03/18/2021

2 Executive Summary

This report provides the results of an RF power density analysis performed for **Verizon** at site **Ozone** in accordance with the Federal Communications Commission (FCC) rules and regulations for RF emissions described in OET Bulletin 65, Edition 97-01.

This report addresses RF safety for two classified groups defined by OET Bulletin 65: Occupational/ Controlled and General Population/ Uncontrolled. Based on the analysis, this site will be **Compliant** with FCC rules and regulations and Verizon's Signage and Barrier Policy if the mitigation details provided in Table 1 are implemented.

Final Compliant Configuration						
	GUIDELINES	NOTICE	CAUTION	WARNING	NOC INFO	BARRIER/MARKER
Access Point(s)	<input checked="" type="checkbox"/> [TBD] *	<input type="checkbox"/> []	<input type="checkbox"/> []	<input type="checkbox"/> []	<input checked="" type="checkbox"/> [TBD] *	<input type="checkbox"/> []
Alpha	<input type="checkbox"/> []	<input type="checkbox"/> []	<input checked="" type="checkbox"/> [1] ***	<input type="checkbox"/> []	<input type="checkbox"/> []	<input type="checkbox"/> []
Beta	<input type="checkbox"/> []	<input checked="" type="checkbox"/> [4] **	<input checked="" type="checkbox"/> [1] ***	<input type="checkbox"/> []	<input type="checkbox"/> []	<input checked="" type="checkbox"/> [] 42' Marker
Gamma	<input type="checkbox"/> []	<input checked="" type="checkbox"/> [1] **	<input checked="" type="checkbox"/> [1] ***	<input type="checkbox"/> []	<input type="checkbox"/> []	<input checked="" type="checkbox"/> [] 5' Marker

NOTE: The table represents either the signage/barriers installed / removed OR items required by the market (if mitigation is not installed by consultant/vendor).

* These RF signs should be posted on any Access Point the Main Roof. (See drawing in Section 5.2b).

** These RF signs should be posted on the Marker of Beta and Gamma sectors. (See drawing in Section 5.2b).

*** These RF signs should be Laying on Rooftop. (See drawing in Section 5.2b).

Specialty Sign Detail

Location	N/A
Access Point	N/A
Alpha	N/A
Beta	N/A
Gamma	N/A

NOTE: The tables above represent EXISTING compliance items implemented at this location.

Notes/ Additional Compliance Requirements(s):

Mitigation is required per the Signage/ Barrier Diagram. NOC and Guidelines Signs need to be posted on any access point to the Roof.

Table 1: Mitigation Requirements for Compliance

2.1 Conclusion and Recommendations

- The results of the analysis indicate that the power density levels in the generally accessible areas on the **Main Roof** Level will exceed the FCC's MPE limit for General Population and Occupational.
- The results of the analysis indicate that the power density levels in the generally accessible areas on the **Adjacent Roof 1** Level will not exceed the FCC's MPE limit for General Population.
- The results of the analysis indicate that the power density levels in the generally accessible areas on the **Ground** Level will not exceed the FCC's MPE limit for General Population.
- The max theoretical % MPE is **395.92%** directly in front of the antennas beams at the **Adjacent Roof 1** Level.
- NOC and Guidelines Signs need to be posted on any Access Point the Main Roof. All access points to these areas need to remain locked at all times.
- This site will operate in general compliance with FCC OET Bulletin 65 and Verizon's signage and barrier policy if the mitigation requirements outlined in the Executive Summary are implemented.

Note: Modifications to the site; and/or increases in channel counts or power levels exceeding those listed in this report will require additional evaluation to determine compliance.

3 Introduction

The purpose of this analysis and report is to evaluate the cumulative power density levels of all non-excluded antennas located on the site and identify any areas of concern that require mitigation. This report also assesses the site's compliance with FCC OET Bulletin 65; "Guidelines for Human Exposure to Radio-frequency Electromagnetic Fields".

The power density simulation performed for this site utilized RoofMaster® analysis software. All antennas were assigned an operating frequency and transmit power and were deemed to be operating at 100% of their rated output power.

3.1 *Site Description:*

- **Site Name:** Ozone
- **Street Address:** 2629 Manhattan Ave
Hermosa Beach, CA 90254
- **Latitude:** 33° 52' 22.2096" N
- **Longitude:** 118° 24' 17.5212" W
- **Structure Type:** Rooftop
- **Structure Height:** ± 15' AGL
- **BTS Equipment Location:** The Verizon equipment is located at the Garage Level.
- **Co-Locators/ Other Antennas:** N/A

3.2 Site Configuration Being Modeled

- This is a Rooftop application where Verizon antennas will be mounted to pipes behind RF screens on the Main Roof.
- This is a Three-Sector site supporting LTE at 700, 850, 1900, 2100 MHz, CBRS, 5GNR at 850 MHz, and C-Band for all sectors. All LTE assumes 4x4 MIMO.
- The values of the antennas' rad center of all sectors (23.5'), Main Roof Height (15'), Adjacent Roof 1 Height (25') are based on the CDs, Google Earth and RFDS. These values must be verified on the site audit for the post study.
- All technologies were evaluated assuming the max number of channels and were running at max power 100% of the time.

4 Predictive Analysis Details

For purposes of this analysis, RoofMaster® was configured to provide an output based on the appropriate MPE limit(s) published in the FCC's guidelines. The antenna information was loaded into RoofMaster®, an MPE predictive analysis tool by Waterford Consultants, LLC.

4.1 Analysis Locations:

Number of Elevations Analyzed: 3

- Main Roof Level
- Adjacent Roof 1Level
- Ground Level

4.2 Antenna Inventory

The following table contains the technical data used to simulate the power density that may be encountered with all antennas simultaneously operating at full rated power with the exception of any excluded antennas cited in this document. If co-locators' antennas exist and specific antenna details could not be secured, generic antennas, frequencies, and transmit powers were used for modeling. The assumptions used are based on past experience with communications carriers.


ID	Name	(MHz) Freq	Trans Power	Trans Count	Other Loss	Calc Power	Mfg	Model	Main Roof Z (ft)	Adjacent Roof 1 Z (ft)	Ground Z (ft)	Type	(ft) Aper	dBd Gain	BWdth	Orientation
VZ Alpha_Ant1	L700	730	60.0	2	0.5	107.0	JMA	MX10FRO440	8.5	-1.5	23.5	Panel	4.4	11.95	43	50
VZ Alpha_Ant1	L850	880	60.0	2	0.5	107.0	JMA	MX10FRO440	8.5	-1.5	23.5	Panel	4.4	13.35	36	50
VZ Alpha_Ant1	L1900	1900	80.0	4	0.5	285.2	JMA	MX10FRO440	8.5	-1.5	23.5	Panel	4.4	15.45	41	50
VZ Alpha_Ant1	CBRS	3600	5.0	4	0.0	20.0	JMA	MX10FRO440	8.5	-1.5	23.5	Panel	4.4	11.85	53	50
VZ Alpha_Ant2	L700	730	60.0	2	0.5	107.0	JMA	MX10FRO440	8.5	-1.5	23.5	Panel	4.4	11.95	43	50
VZ Alpha_Ant2	L850	880	60.0	2	0.5	107.0	JMA	MX10FRO440	8.5	-1.5	23.5	Panel	4.4	13.35	36	50
VZ Alpha_Ant2	L2100	2110	40.0	4	0.5	142.6	JMA	MX10FRO440	8.5	-1.5	23.5	Panel	4.4	16.25	41	50
VZ Alpha_Ant2	L2100_3	2170	40.0	4	0.5	142.6	JMA	MX10FRO440	8.5	-1.5	23.5	Panel	4.4	16.25	41	50
VZ Alpha_Ant2	C-Band	3700	80.0	4	0.0	320.0	JMA	MX10FRO440	8.5	-1.5	23.5	Panel	4.4	14.8	40	50
VZ Beta-Ant1	L700	730	60.0	2	0.5	107.0	JMA	MX10FRO440	8.5	-1.5	23.5	Panel	4.4	11.95	43	150
VZ Beta-Ant1	L850	880	60.0	2	0.5	107.0	JMA	MX10FRO440	8.5	-1.5	23.5	Panel	4.4	13.35	36	150
VZ Beta-Ant1	L1900	1900	80.0	4	0.5	285.2	JMA	MX10FRO440	8.5	-1.5	23.5	Panel	4.4	15.45	41	150
VZ Beta-Ant1	CBRS	3600	5.0	4	0.0	20.0	JMA	MX10FRO440	8.5	-1.5	23.5	Panel	4.4	11.85	53	150
VZ Beta-Ant2	L700	730	60.0	2	0.5	107.0	JMA	MX10FRO440	8.5	-1.5	23.5	Panel	4.4	11.95	43	150
VZ Beta-Ant2	L850	880	60.0	2	0.5	107.0	JMA	MX10FRO440	8.5	-1.5	23.5	Panel	4.4	13.35	36	150
VZ Beta-Ant2	L2100	2110	40.0	4	0.5	142.6	JMA	MX10FRO440	8.5	-1.5	23.5	Panel	4.4	16.25	41	150
VZ Beta-Ant2	L2100_3	2170	40.0	4	0.5	142.6	JMA	MX10FRO440	8.5	-1.5	23.5	Panel	4.4	16.25	41	150
VZ Beta-Ant2	C-Band	3700	80.0	4	0.0	320.0	JMA	MX10FRO440	8.5	-1.5	23.5	Panel	4.4	14.8	40	150
VZ Gamma-Ant1	L700	730	60.0	2	0.5	107.0	JMA	MX10FRO440	8.5	-1.5	23.5	Panel	4.4	11.95	43	330
VZ Gamma-Ant1	L850	880	60.0	2	0.5	107.0	JMA	MX10FRO440	8.5	-1.5	23.5	Panel	4.4	13.35	36	330
VZ Gamma-Ant1	L1900	1900	80.0	4	0.5	285.2	JMA	MX10FRO440	8.5	-1.5	23.5	Panel	4.4	15.45	41	330
VZ Gamma-Ant1	CBRS	3600	5.0	4	0.0	20.0	JMA	MX10FRO440	8.5	-1.5	23.5	Panel	4.4	11.85	53	330
VZ Gamma-Ant2	L700	730	60.0	2	0.5	107.0	JMA	MX10FRO440	8.5	-1.5	23.5	Panel	4.4	11.95	43	330
VZ Gamma-Ant2	L850	880	60.0	2	0.5	107.0	JMA	MX10FRO440	8.5	-1.5	23.5	Panel	4.4	13.35	36	330
VZ Gamma-Ant2	L2100	2110	40.0	4	0.5	142.6	JMA	MX10FRO440	8.5	-1.5	23.5	Panel	4.4	16.25	41	330
VZ Gamma-Ant2	L2100_3	2170	40.0	4	0.5	142.6	JMA	MX10FRO440	8.5	-1.5	23.5	Panel	4.4	16.25	41	330
VZ Gamma-Ant2	C-Band	3700	80.0	4	0.0	320.0	JMA	MX10FRO440	8.5	-1.5	23.5	Panel	4.4	14.8	40	330

The antenna Z-heights listed above are referenced to the Main Roof, Adjacent Roof 1 and Ground levels.


4.3 RF Emissions Diagram(s) - All Transmitters

The following Diagram(s) represent the theoretical spatially averaged Maximum Permissible Exposure (MPE) percentages that are expected for each study's elevation. An additional 1% Occupational MPE Limit (5% General Population MPE limit) is included to demonstrate where Verizon is a significant contributor to the accessible areas where multiple carriers' transmitters may be present.


Reference Plane: Main Roof Level

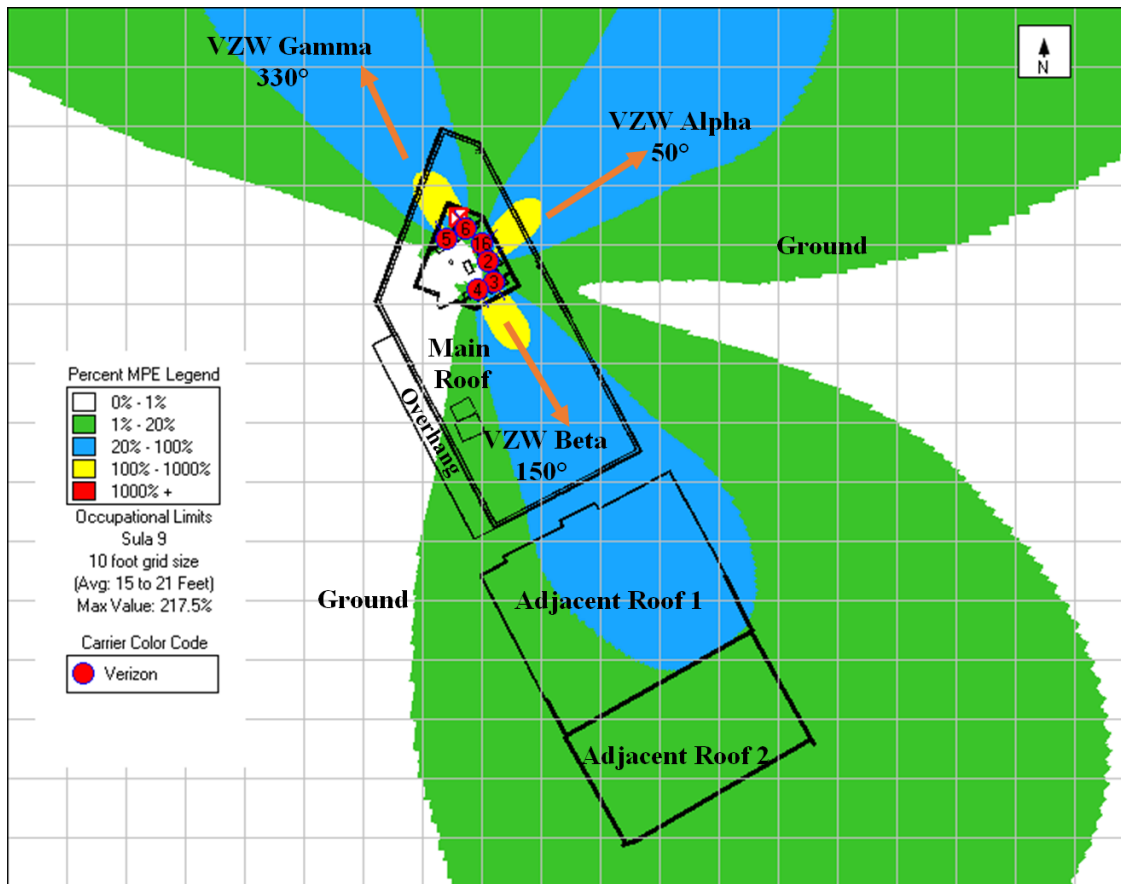

Reference Plane: Adjacent Roof 1 Level

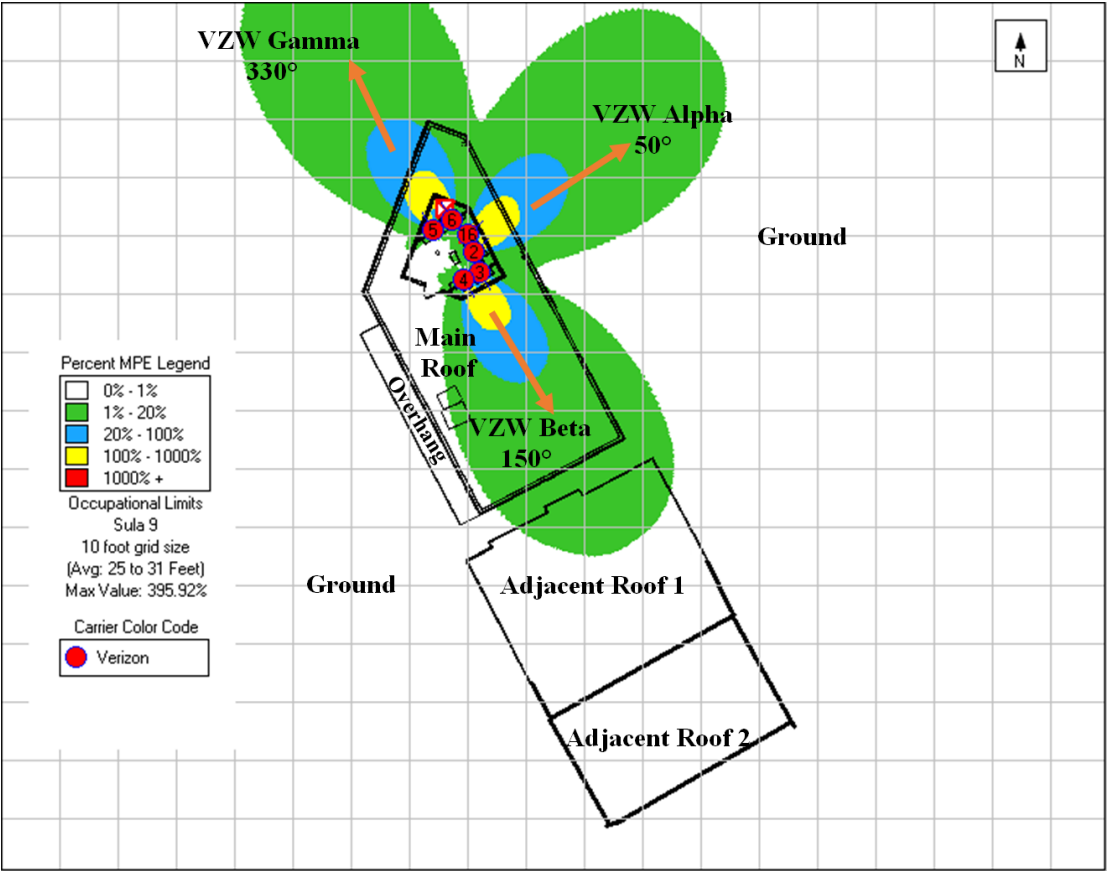


Reference Plane: Ground Level

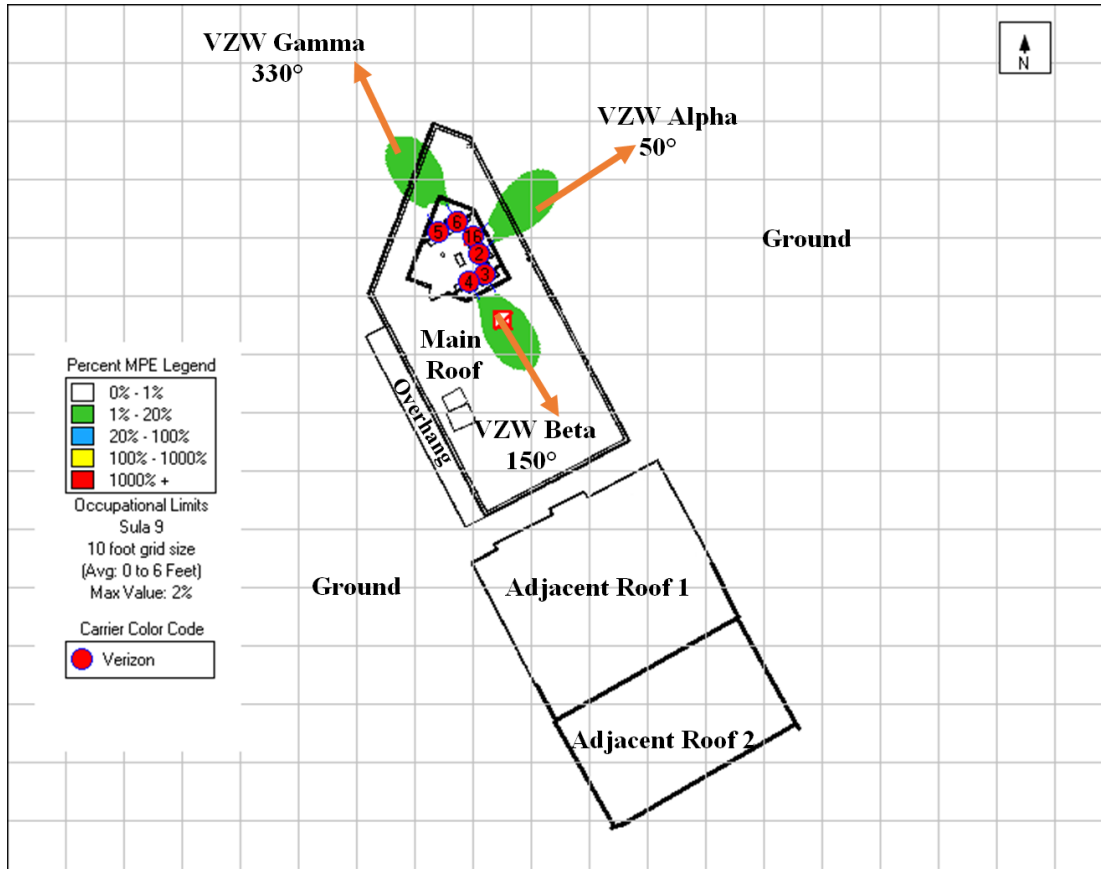


4.4 RF Emissions Diagram(s) - Verizon Transmitters *Only*

The following Diagram(s) represent the theoretical spatially averaged Maximum Permissible Exposure (MPE) percentages that are expected for each study's elevation. An additional 1% Occupational MPE Limit (5% General Population MPE limit) is included to demonstrate where Verizon is a significant contributor to the accessible areas where multiple carriers' transmitters may be present.


Reference Plane: Main Roof Level

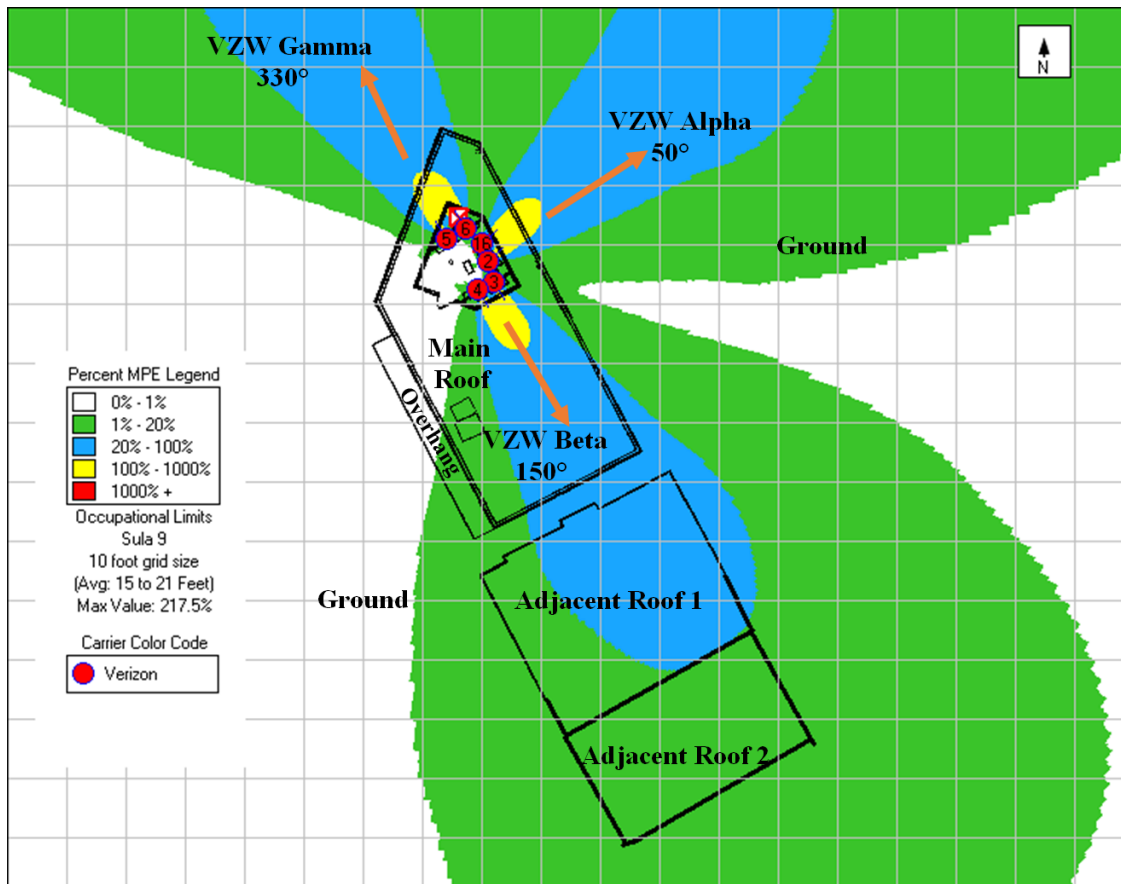

Reference Plane: Adjacent Roof 1 Level

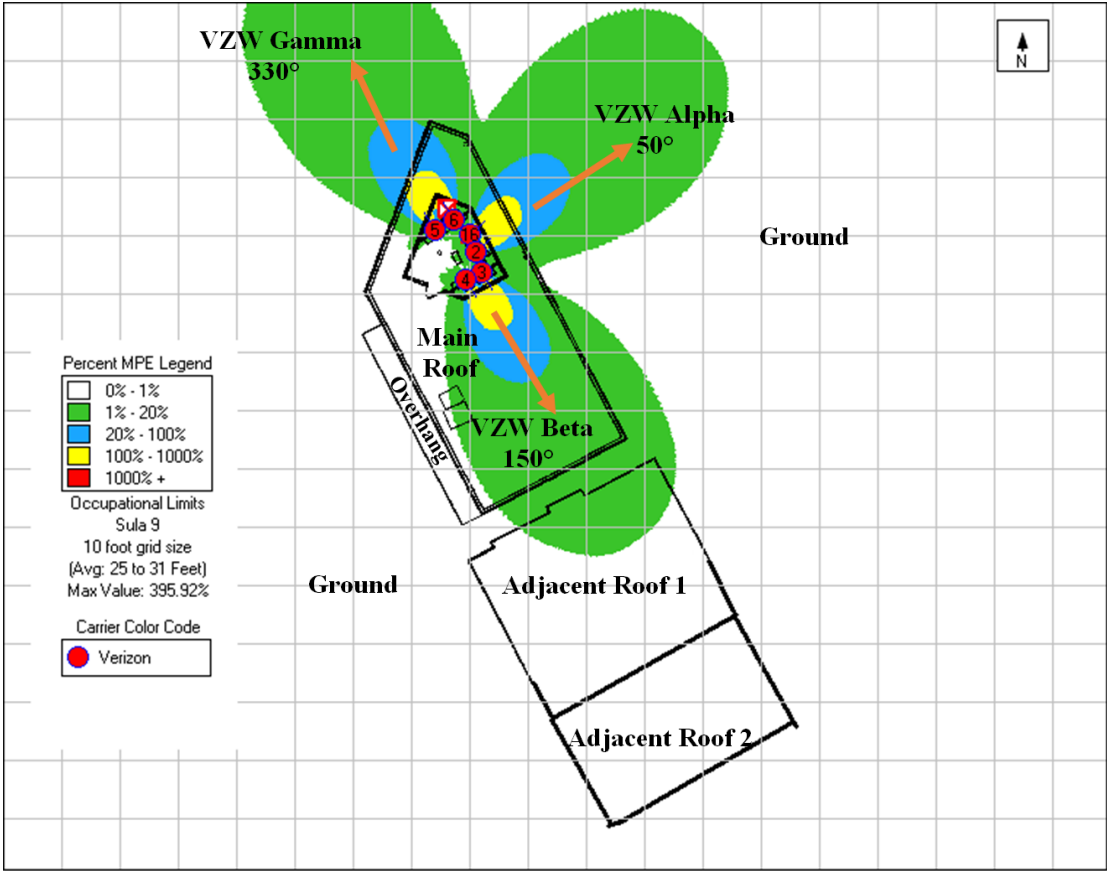



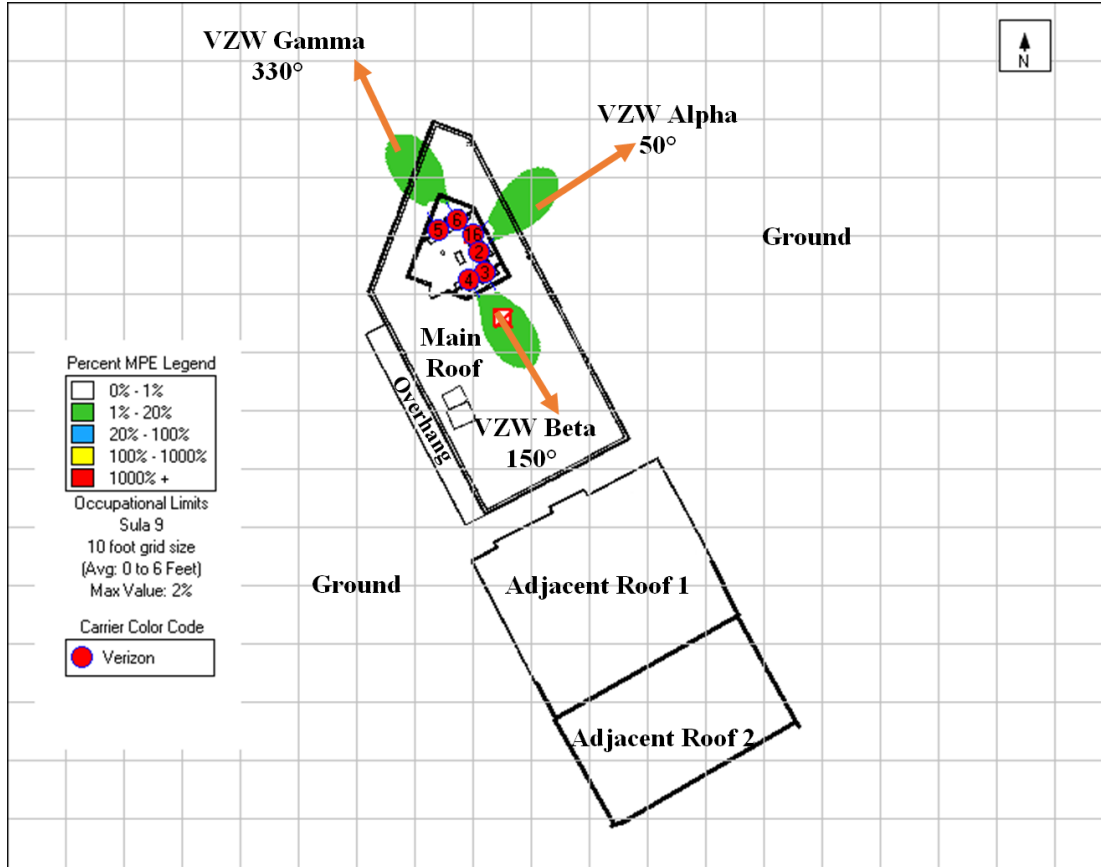



Reference Plane: Ground Level



5 Signage/ Mitigation

5.1 Signage/ Barrier Detail

Final Compliant Configuration						
	GUIDELINES	NOTICE	CAUTION	WARNING	NOC INFO	BARRIER/MARKER
Access Point(s)	<input checked="" type="checkbox"/> [TBD] *	<input type="checkbox"/> []	<input type="checkbox"/> []	<input type="checkbox"/> []	<input checked="" type="checkbox"/> [TBD] *	<input type="checkbox"/> []
Alpha	<input type="checkbox"/> []	<input type="checkbox"/> []	<input checked="" type="checkbox"/> [1] ***	<input type="checkbox"/> []	<input type="checkbox"/> []	<input type="checkbox"/> []
Beta	<input type="checkbox"/> []	<input checked="" type="checkbox"/> [4] **	<input checked="" type="checkbox"/> [1] ***	<input type="checkbox"/> []	<input type="checkbox"/> []	<input checked="" type="checkbox"/> [] 42' Marker
Gamma	<input type="checkbox"/> []	<input checked="" type="checkbox"/> [1] **	<input checked="" type="checkbox"/> [1] ***	<input type="checkbox"/> []	<input type="checkbox"/> []	<input checked="" type="checkbox"/> [] 5' Marker

NOTE: The table represents either the signage/barriers installed / removed OR items required by the market (if mitigation is not installed by consultant/vendor).

* These RF signs should be posted on any Access Point the Main Roof. (See drawing in Section 5.2b).

** These RF signs should be posted on the Marker of Beta and Gamma sectors. (See drawing in Section 5.2b).

*** These RF signs should be Laying on Rooftop. (See drawing in Section 5.2b).

Specialty Sign Detail

Location	N/A
Access Point	N/A
Alpha	N/A
Beta	N/A
Gamma	N/A


NOTE: The tables above represent EXISTING compliance items implemented at this location.

Notes/ Additional Compliance Requirements(s):

Mitigation is required per the Signage/ Barrier Diagram. NOC and Guidelines Signs need to be posted on any access point to the Roof.

Table 2: Mitigation Requirements for Compliance

5.2 Signage/ Barrier Diagram

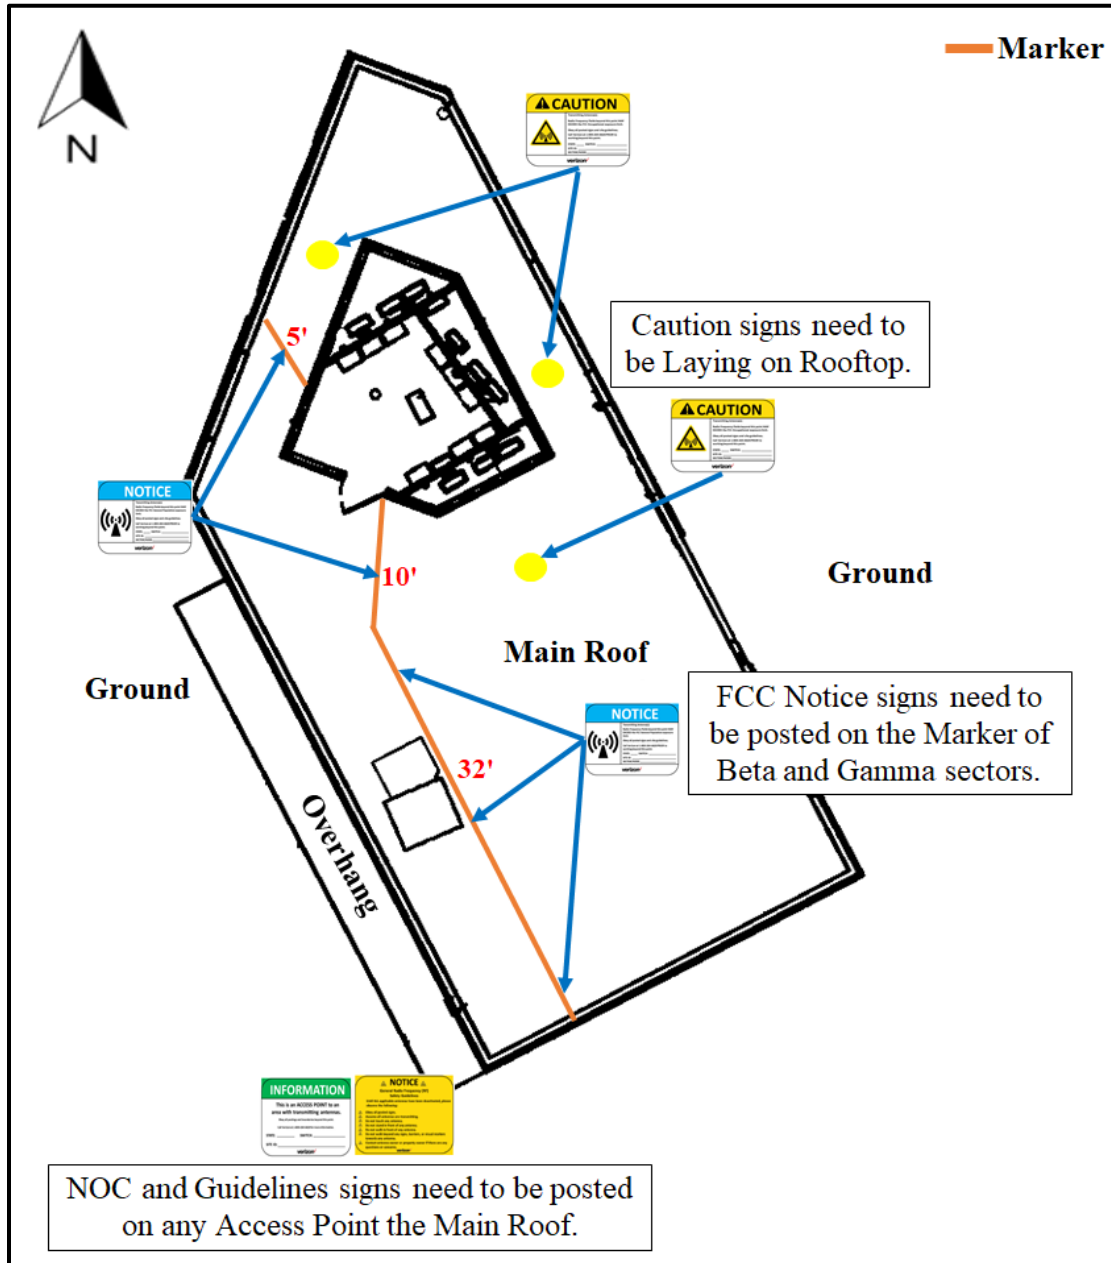

6 Conclusions and Recommendations

- The results of the analysis indicate that the power density levels in the generally accessible areas on the **Main Roof** Level will exceed the FCC's MPE limit for General Population and Occupational.
- The results of the analysis indicate that the power density levels in the generally accessible areas on the **Adjacent Roof 1** Level will not exceed the FCC's MPE limit for General Population.
- The results of the analysis indicate that the power density levels in the generally accessible areas on the **Ground** Level will not exceed the FCC's MPE limit for General Population.
- The max theoretical % MPE is **395.92%** directly in front of the antennas beams at the **Adjacent Roof 1** Level.
- NOC and Guidelines Signs need to be posted on any Access Point the Main Roof. All access points to these areas need to remain locked at all times.
- This site will operate in general compliance with FCC OET Bulletin 65 and Verizon's signage and barrier policy if the mitigation requirements outlined in the Executive Summary are implemented.

Note: Modifications to the site; and/or increases in channel counts or power levels exceeding those listed in this report will require additional evaluation to determine compliance.

7 Appendix A: FCC Compliance and RF Safety Policies

In August of 1997, the FCC published OET Bulletin 65 Edition 97-01 to regulate methods for evaluating compliance with FCC guidelines for human exposure to radiofrequency (RF) electromagnetic fields. The FCC guidelines for human exposure to RF electromagnetic fields incorporate two categories of limits; namely “Controlled” (a.k.a. Occupational) and “Uncontrolled” (a.k.a. General Public). The guidelines offer suggested methods for evaluating fixed RF transmitters to ensure that the controlled and uncontrolled limits deemed safe by the FCC for human exposure are not exceeded.

OET Bulletin 65 recommended guidelines are intended to allow an applicant to “make a reasonably quick determination as to whether a proposed facility is in compliance with the limits.” In addition, the guidelines offer alternate supplementary considerations and procedures such as field measurements and more detailed analysis that should be used for multiple emitter situations.

These guidelines define RF as emissions in the frequency range of 300 kHz to 100 GHz. The FCC define Maximum Permissible Exposure (MPE) limits within this frequency range based on limits recommended by the National Council on Radiation Protection and Measurement, the Institute of Electrical and Electronics Engineers (IEEE), and by the American National Standards Institute (ANSI).

The specific MPE limits defined by the FCC are as follows:

Limits for Occupational/Controlled Exposure				
Frequency Range [MHz]	Electric Field Strength (E) [V/m]	Magnetic Field Strength (H) [A/m]	Power Density (S) [mW/Cm ²]	Averaging Time E ² , H ² or S [minutes]
0.3 - 3.0	614	1.63	100*	6
3.0 - 30	1842/f	4.89/f	900/f ² *	6
30 - 300	61.4	0.163	1	6
300 - 1,500	-	-	f/300	6
1,500 - 100,000	-	-	5	6

Limits for General Population/Uncontrolled Exposure				
Frequency Range [MHz]	Electric Field Strength (E) [V/m]	Magnetic Field Strength (H) [A/m]	Power Density (S) [mW/Cm ²]	Averaging Time E ² , H ² or S [minutes]
0.3 - 3.0	614	1.63	100*	30
3.0 - 30	842/f	2.19/f	180/f ² *	30
30 - 300	27.5	0.073	0.2	30
300 - 1,500	-	-	f/1500	30
1,500 - 100,000	-	-	1	30

f = frequency

*Plane-wave equivalent power density

The FCC states that “Occupational/ Controlled limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure. Limits for Occupational/ Controlled exposure also apply in situations when an individual is transient through a location where Occupational/ Controlled limits apply provided he or she is made aware of the potential for exposure.”

8 Appendix B: Overview of RoofMaster® Functions and Assumptions

RoofMaster® is a RF Compliance software package designed to enable the analysis, assessment and mitigation of communications sites with respect to human exposure to radiofrequency electromagnetic fields.

RoofMaster® was developed in 2008 by Waterford Consultants to support compliance assessments performed at single and multi-operator wireless locations throughout North America and has been in service since 2008. Real-world experience in evaluating thousands of base station installations is reflected in the RoofMaster® design approach. This document provides a guide for creating simulations of RF hazard conditions through the characterization of antenna systems and site features and through FCC-specified computational analysis.

On any structure, one may encounter antennas installed by wireless service providers, public safety and other FCC-licensed and unlicensed operators. Siting constraints have resulted in diverse and complex environments accessible to people performing a variety of activities around these antennas. RoofMaster® supports the characterization of these locations to convey important information regarding RF sources and accessible areas necessary to evaluate the potential for human exposure to hazardous levels of RF energy.

RoofMaster® supports the depiction of communications sites through the display of construction drawing or aerial photography image files as well as providing line drawing tools. These representations are scalable to enable the modeling of any location.

RoofMaster® utilizes a three-dimensional spatial framework consisting of a 1000 x 1000 grid with unlimited vertical dimensions necessary for the positioning of antennas and modeling of RF conditions at each grid point throughout the space. Predictive analysis is performed on a study plane at a specified elevation. The subsequent sections of this guide provide the steps necessary to create a site representation and conduct these studies.

RoofMaster® employs several power density prediction models based on the computational approaches set forth in the Federal Communications Commission's Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields, OET Bulletin 65. This guideline utilizes several antenna and operational parameters in calculating the power density contributions from each emitter at specified points throughout the study space. RoofMaster® enables antennas to be fully defined in site specific aspects as well as through the use of a library of manufacturer data. The parameters include:

- § Antenna model
- § Radiation patterns
- § Aperture length
- § Gain
- § Beamwidth
- § Antenna radiation center
- § Azimuth
- § Mechanical downtilt
- § Location
- § Frequency
- § Power into antenna

In OET-65, the Cylindrical Model is presented as an approach to determine the spatially averaged power density in the near field directly in front of an antenna. In order to implement this model in all directions, RoofMaster® utilizes the antenna manufacturer horizontal pattern data. Additionally, RoofMaster® incorporates factors that reduce the power density by the inverse square of horizontal and vertical distance beyond the near field region.


Power density is calculated as follows:

$$S = \left(\left(\frac{360}{\text{Beamwidth}} \right) \frac{P_{in} G_H H_r V_r}{2 \pi R h} \right) \frac{\mu W}{cm^2}$$

- S is the spatially averaged power density value
- R is the horizontal distance meters to the study point
- h is the aperture length in meters
- P_{in} is power into the antenna input port in Watts

RoofMaster® Implementation:

- G_H is gain offset to study point as specified in manufacturer horizontal pattern
- P_{in} is adjusted by the portion of the antenna aperture in the 0-6 ft. vertical study zone
- H_r accounts for 1/R² Far Field roll off which starts at 2*h
- V_r accounts for 1/ (vertical distance)² roll off from antenna bottom to the top of the 0-6 ft. study zone (or antenna top to bottom of 0-6 ft. study zone)

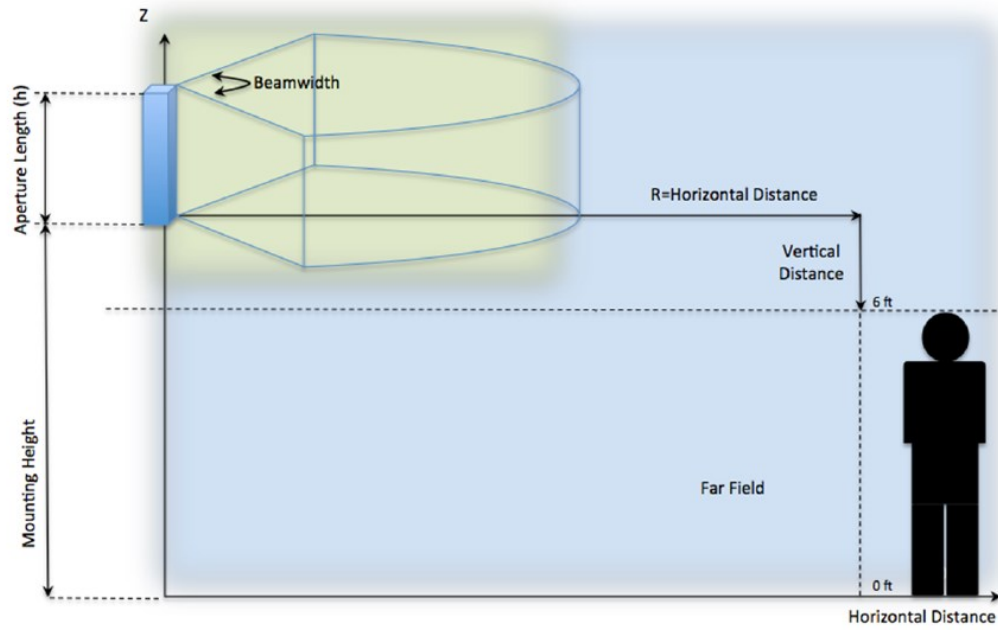

9 References

FCC (1997). “Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields”; Federal Communications Commission; Office of Engineering and Technology, OET Bulletin 65, Edition 97-01, August.

Waterford Consultants, LLC (2008). RoofMaster® User Guide, Waterford Consultants, LLC.

10 Limited Warranty

Pramira, Inc. warrants that this analysis was performed in good faith using the methodologies and assumptions covered in this report and that data used for the analysis and report were obtained by Pramira, Inc. employees or representatives via site surveys or research of Verizon's available information. In the event that specific third-party details were not available, best efforts were made to use assumptions that are based on industry experience of various carriers' standards without violating any confidential information obtained under non-disclosure terms.

Pramira, Inc. also warrants that this analysis was performed in accordance with industry acceptable standards and methods.

There are no other warranties, express or implied, including but not limited to, the implied warranties of merchantability and fitness for a particular purpose, relating to this agreement or to the services rendered by Pramira hereunder. In no event shall Pramira be held liable to Verizon, or to any third party, for any indirect, special, incidental, or consequential damages, including but not limited to loss of profits, loss of data, loss of good will, and increased expenses. In no event shall Pramira be liable to Verizon for damages, whether based in contract, tort, negligence, strict liability, or otherwise, exceeding the amount payable hereunder for the services giving rise to such liability.